


STFC

STFC系列S型传感器

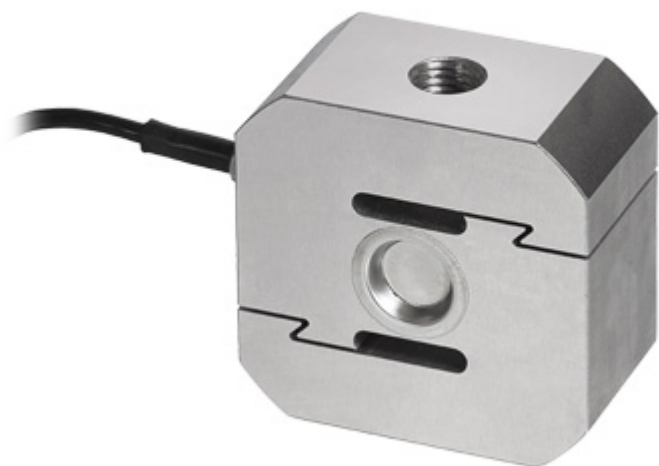

S型传感器广泛应用于悬浮式称量系统, 例如料仓、料筒等。还提供CE-M认证型号。

量程 (kg): 2000, 5000, 10000.

镀镍钢 IP67 C3精度

规格参数

- C3精度
- 镀镍钢结构
- IP67
- 量程可选2000 - 10000 kg
- 配屏蔽电缆
- 可选检测证书

性能参数

- 小检定分度值: $V_{min} = E_{Max}/10.000$
- 大检定分度数: $n_{LC} = 3000$
- 综合误差: 0.02% F.S.
- 灵敏度: 2mV/V +/- 0.5%
- 温度对零点输出的影响: 0.0013% F.S. /10°C
- 温度对灵敏度的影响: 0.0014% F.S. /10°C
- 温度补偿范围: -10°C/+40°C
- 工作温度: -20°C/+60°C
- 蠕变 (30分钟): 0.03% F.S.
- 激励电压: 10 VDC
- 输入阻抗: 1100 Ohm
- 输出阻抗: 1000 Ohm
- 零点回复: +/-1% F.S.
- 绝缘阻值: >5000 MOhm
- 安全过载: 150% F.S.
- 极限过载: 300% F.S.
- 4芯屏蔽电缆, 长5m, 直径5mm

防爆型号

- 若传感器配有CCATEX防爆证书, 则可以使用在爆炸性环境中, 防爆等级:
ATEX II 1G Ex ia IIC T6 (Ta -20÷+40°C) TX (Ta -20÷+65°C) Ga
ATEX II 1D Ex ta IIIC TX°C (Ta -20÷+40°C) TX°C (Ta -20÷+65°C) Da IP65.
此证书包含ATEX CE声明文件 (英文版、德文版、法文版或意大利文版)。
- 注意: 需要为每一只防爆传感器各配一份防爆证书。

•

•

可选型号

????

Codice	Max (kg)
STFC2000 	2000
STFC5000 	5000
STFC10000 	10000



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE