




T_OLD20181207

"T"系列台秤

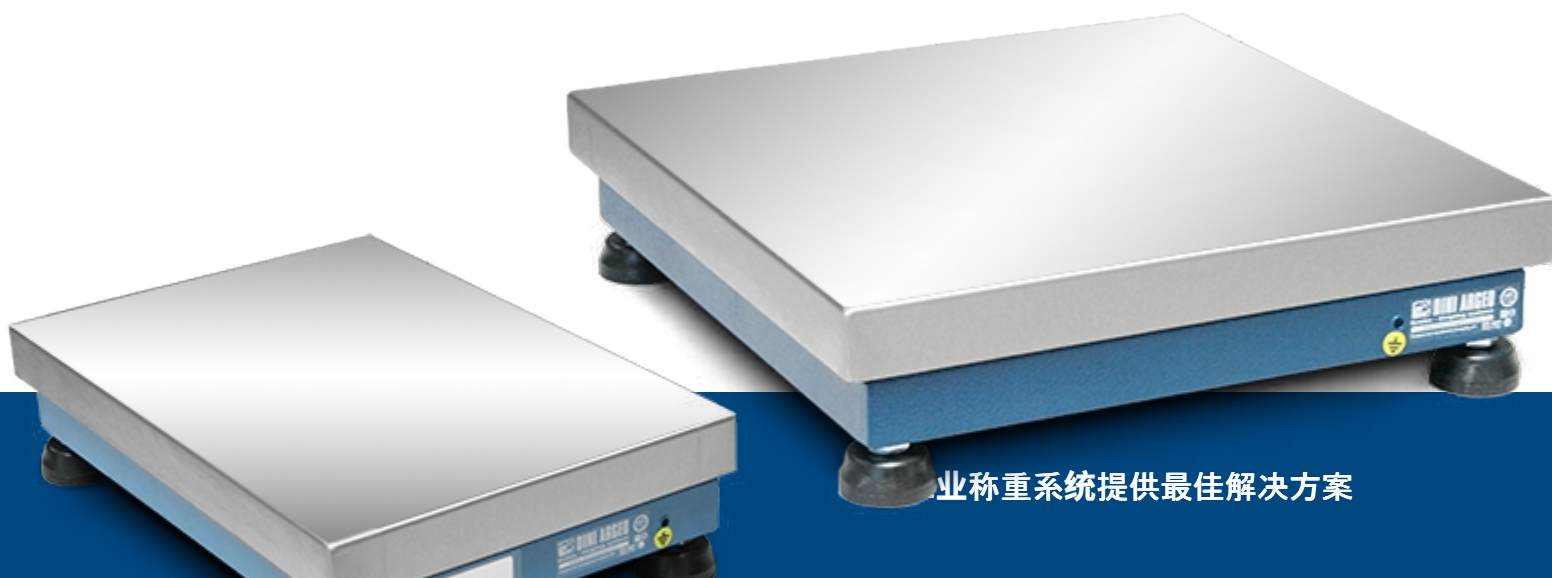

业称重系统提供最佳解决方案



规格参数

- 内含IP65铝质平行梁传感器，符合OIML R60标准。输入阻值:350 Ohm。
- 秤架为蓝色喷漆钢结构，可调节支脚与水平泡。
- AISI 304不锈钢秤盘。
- 最大15 Vdc供电。
- 3m连接电缆，供连接称重显示器使用。

可选配件

- 标定证书
- CE-M 3000e或3000+3000e检定证书
- CE-M 6000e或6000+6000e检定证书
- 高精度型号

防爆证书

- CCATEX:传感器防爆证书
- DCATEX2GD:1&21区防爆证书, 含称重部分 + 防爆称重显示器
- DCATEX3GD:2&22区防爆证书, 含称重部分 + 防爆称重显示器

附件

- 称重显示器立杆
- 台秤小推车
- 台秤托高架
- 皮带与辊轮
- 尺寸与量程定制

根据价格估计

- 用于装载表面的皮带和辊单元
- 特殊尺寸和容量
-

可选型号

????

Codice	l x w x h (mm)	Max (kg)	d (g)	M (g)*	M 2R (g)*	d HR (g)*
<u>IS3</u>	230x330x93	3	0,5	1	--	0,1
<u>IS6</u>	230x330x93	6	1	2	1-2	0,2
<u>IS15</u>	230x330x93	15	2	5	2-5	0,5
<u>IT6</u>	330x330x93	6	1	2	1-2	0,2
<u>IT15</u>	330x330x93	15	2	5	2-5	0,5
<u>IT30</u>	330x330x93	30	5	10	5-10	1
<u>IQ15</u>	400x400x115	15	2	5	2- 5	0,5
<u>IQ30</u>	400x400x115	30	5	10	5-10	1
<u>IQ60</u>	400x400x115	60	10	20	10-20	2
<u>IQ150</u>	400x400x115	150	20	50	20-50	5
<u>IM30</u>	400x500x120	30	5	10	5-10	1
<u>IM60</u>	400x500x120	60	10	20	10-20	2
<u>IM150</u>	400x500x120	150	20	50	20-50	5
<u>IC30</u>	500x500x110	30	5	10	5-10	1
<u>IC60</u>	500x500x110	60	10	20	10-20	2
<u>IC150</u>	500x500x110	150	20	50	20-50	5
<u>IL60</u>	500x600x132	60	10	20	10-20	2
<u>IL150</u>	500x600x132	150	20	50	20-50	5
<u>IL300</u>	500x600x132	300	50	100	50-100	10
<u>IX60</u>	600x600x137	60	10	20	10-20	2
<u>IX150</u>	600x600x137	150	20	50	20-50	5
<u>IX300</u>	600x600x137	300	50	100	50-100	10
<u>IG150</u>	700x700x145	150	20	50	--	5
<u>IG300</u>	700x700x145	300	50	100	50-100	10
<u>IG600</u>	700x700x145	600	100	200	100-200	20

(*) 此精度仅在配有相关证书后才有效。



DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE