

SPSZ

SPSZ系列不锈钢平行梁传感器



不锈钢平行梁传感器，广泛应用于仅安装一只传感器且台面尺寸不超过800x800mm的台秤，还提供CE-M认证型号。

量程 (kg): 500, 1000.

17-4 PH不锈钢 IP68 / IP69K C3精度


规格参数

- C3精度
- 离心负载补偿
- 17-4 PH不锈钢结构
- IP68
- 量程可选500 - 1000 kg
- 适用于台面尺寸不超过800 x 800 mm的台秤
- 配屏蔽电缆
- 可选OIML及检测证书

性能参数

- 小检定分度值: $V_{min} = E_{Max}/10.000$
- 大检定分度数: $n_{LC} = 3000$
- 灵敏度: $2mV/V \pm 10\%$
- 温度对零点输出的影响: $0.01\% \text{ F.S. } / 10K$
- 温度对灵敏度的影响: $0.001\% \text{ F.S. } / 10K$
- 温度补偿范围: $-10^{\circ}C / +40^{\circ}C$
- 工作温度: $-10^{\circ}C / +50^{\circ}C$
- 蠕变 (30分钟): $0.01\% \text{ F.S.}$
- 激励电压: 15 VDC
- 输入阻抗: $380 \pm 15 \text{ Ohm}$
- 输出阻抗: $350 \pm 10 \text{ Ohm}$
- 绝缘阻值 (100V): $>2000 \text{ MOhm}$
- 安全过载: $300\% \text{ F.S.}$
- 极限过载: $300\% \text{ F.S.}$
- 位移偏量: $<0.5mm$
- 6芯屏蔽电缆, 长3m, 直径5mm

产品详情 1

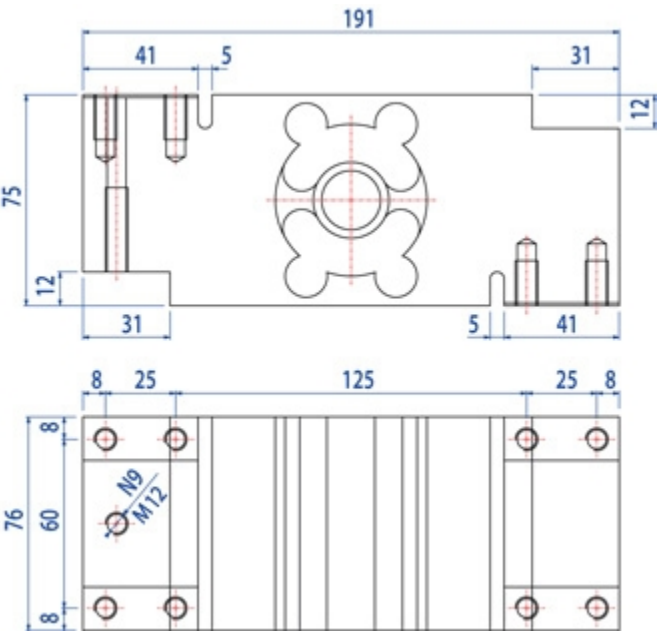

尺寸 mm

线缆定义	
颜色	定义
白	输出 +
绿	反馈 +
蓝	输入 +
红	输出 -
黑	输入 -
灰	反馈 -

可选型号

????		
Codice	Piatto Max (mm)	Max (kg)
SPSZ500 	800 x 800	500
SPSZ1000 	800 x 800	1000



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 843418

SERVICE ASSISTANCE

Via Dell'Elettronica, 15
41042 Spezzano di Fiorano Modena • Italy
Tel. +39.0536 921784

SALES AND TECHNICAL ASSISTANCE SERVICE